


# Installation Instructions for EPG16 Pistol Grip

**BEFORE INSTALLATION, MAKE SURE THE WEAPON IS UNLOADED AND THE SAFETY ENGAGED.**

**1**

Remove factory grip. Be careful not to lose safety detent and safety detent spring.

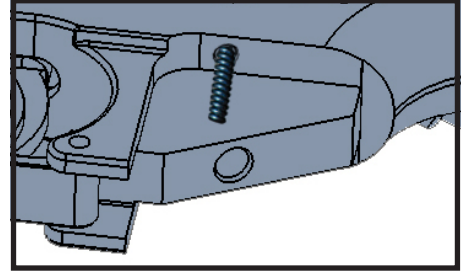


**2**

Place safety detent in lower receiver and safety detent spring in hole in grip.

**3**

Place EPG16 onto lower receiver ensuring spring enters hole in receiver.

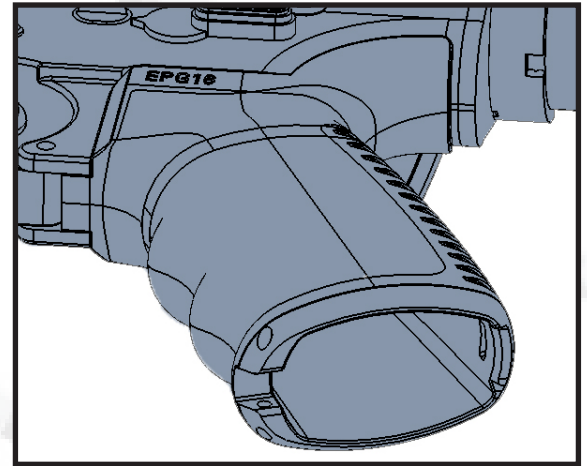

**4**

Re-install grip screw and washer into grip and tighten.

**5**


Test action of safety/selector.

## EPG16

Water resistant plug



Foam Insert w/Lanyard



EPG16 Pistol Grip



**BASE COMPONENTS**

780 HAUNTED LANE  
BENSALEM, PA 19020  
TEL 267-803-1517  
FAX 267-803-1002  
INFO@MISSIONFIRSTTACTICAL.COM



**MADE IN USA**

**LIFETIME WARRANTY**

**⚠ WARNING: OBSERVE SAFE FIREARM HANDLING PRACTICES AT ALL TIMES. FAILURE TO DO SO MAY RESULT IN BODILY INJURY OR DEATH**

Mission First Tactical shall not be responsible for injury, death or damage to property resulting from improper installation, misuse or illegal use of this product.