






Installation Instructions for EPG16 Pistol Grip

BEFORE INSTALLATION, MAKE SURE THE WEAPON IS UNLOADED AND THE SAFETY ENGAGED.

- 1** Remove factory grip. Be careful not to lose safety detent and safety detent spring. 
- 2** Place safety detent in lower receiver and safety detent spring in hole in grip.
- 3** Place EPG16 onto lower receiver ensuring spring enters hole in receiver. 
- 4** Re-install grip screw and washer into grip and tighten.
- 5** Test action of safety/selector.
- 6** The EPG16 grip has three each front and rear interchangeable inserts. 
- 7** The inserts are installed/removed by sliding onto grooves on the grip and are secured by cross pins. 

EPG16 BASE COMPONENTS

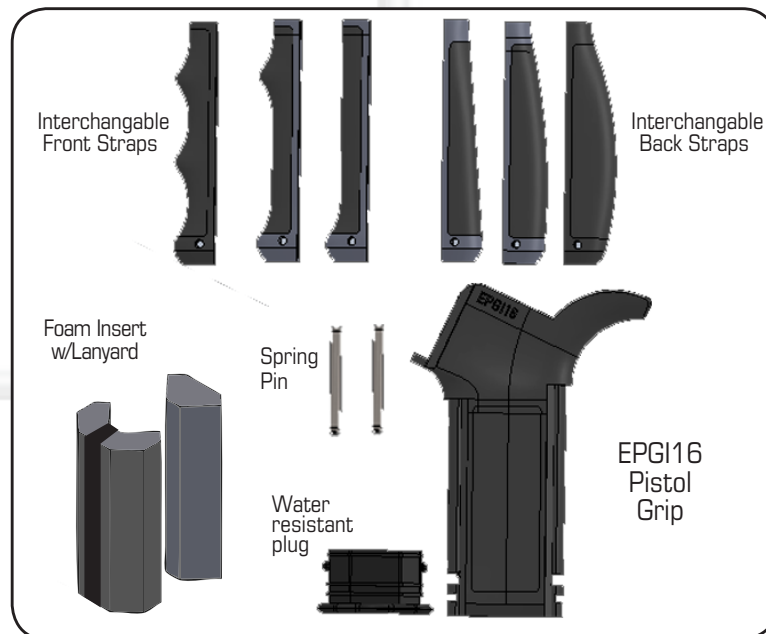

780 HAUNTED LANE
BENSALEM, PA 19020
TEL 267-803-1517
FAX 267-803-1002
INFO@MISSIONFIRSTTACTICAL.COM

 **MADE IN USA**
LIFETIME WARRANTY

⚠ WARNING: OBSERVE SAFE FIREARM HANDLING PRACTICES AT ALL TIMES. FAILURE TO DO SO MAY RESULT IN BODILY INJURY OR DEATH

Mission First Tactical shall not be responsible for injury, death or damage to property resulting from improper installation, misuse or illegal use of this product.